

Radio control model / Flugmodell  
**BEECHCRAFT**  
**T-34 MENTOR**  
MILITARY TRAINER



VQ No: VQA095

ALL Balsa, PLYWOOD CONSTRUCTION AND ALMOST READY TO FLY

## Instruction manual / Montageanleitung

### SPECIFICATIONS

Wingspan:.....1560mm (61.4in)  
Length:.....1170mm (46 in)  
Electric Motor:.....See next pager  
Glow Engine:......46 2-T / .70 4-T  
RTF Weight: 3.2Kg / 7.05lbs (Will vary with  
Equipment Used).  
Radio:.....6 Channel / 6-7 Servos  
Function: Ailerons-Elevator-Rudder-Throttle  
Flaps-Optional Retractable Landing Gear.

### TECHNISCHE DATEN



Spannweite:.....1560mm  
Länge:.....1170mm  
Elektroantrieb.....(siehe nächste Seite)  
Verbrennerantrieb:.....7.45cc - 11.5cc  
Fluggewicht:.....3.2Kg  
Fernsteuerung.....6 Kanal / 6-7 Servos



**WARNING!** This radio controlled model is NOT a toy. If modified or flown carelessly it could go out of control and cause serious human injury or property damage. Before flying your airplane, ensure the air field is spacious enough. Always fly it outdoors in safe areas and seek professional advice if you are unexperienced.

**ACHTUNG!** Dieses ferngesteuerte Modell ist KEIN Spielzeug! Es ist für fortgeschrittene Modellfluggpiloten bestimmt, die ausreichende Erfahrung im Umgang mit derartigen Modellen besitzen. Bei unsachgemäßer Verwendung kann hoher Personen- und/oder Sachschaden entstehen. Fragen Sie in einem Modellbauverein in Ihrer Nähe um professionelle Unterstützung, wenn Sie Hilfe im Bau und Betrieb benötigen. Der Zusammenbau dieses Modells ist durch die vielen Abbildungen selbsterklärend und ist für fortgeschrittene, erfahrene Modellbauer bestimmt.

**REQUIRED FOR OPERATION (Purchase separately) More info: [www.pichler-modellbau.de](http://www.pichler-modellbau.de)**

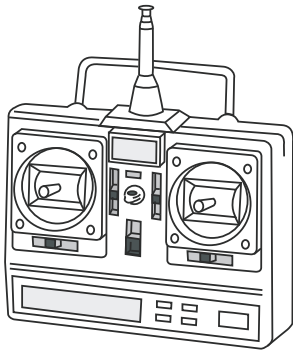


Minimum 6 channel radio for airplane with 5 (4 for EP) standard servos and two servo mini.


.Motor control x1 (for GP) .Elevator x1  
.Rudder x1. Aileron x2. Flap x2 mini servo



10.5x6 for .40 - 2 cycle engine  
11x6 for .46 - 2 cycle engine  
12x6 for .60 - 4 cycle engine  
12x7 for .70 - 4 cycle engine  
13x7 - 13x8 for electric motor




.46 ~ .50 - 2 cycle




.60 ~ .70 - 4 cycle



Silicone tube



Extension for aileron servo, retract servo and Rx battery pack.




G-46 HP Motor

5 cell 4500mAh LiPo battery

**GLUE (Purchase separately)**



Silicon sealer



Cyanoacrylate Glue



Epoxy Glue ( 5 minute type)


Epoxy Glue (30 minute type)

**TOLLS REQUIRED (Purchase separately)**

Hobby knife 

Phillip screw driver 

Hex Wrench 

Needle nose Pliers 

Scissors 

Awl 


Sander 

Wire Cutters 

Masking tape - Straight Edged Ruler - Pen or pencil - Drill and Assorted Drill Bits


If exposed to direct sunlight and/or heat, wrinkles can appear. Storing the model in a cool place will let the wrinkles disappear. Otherwise, remove wrinkles in covering film with a hair dryer, starting with low temperature. You can fix the corners by using a hot iron.


Bei Sonneneinstrahlung und/oder Wärme kann die Folie erschlaffen bzw. Falten entstehen. Verwenden Sie ein Warmluftgebläse (Haartrockner) um evtl. Falten aus der Folie zu bekommen. Die Kanten können Sie mit einem Bügeleisen behandeln. Nicht zuviel Hitze anwenden !

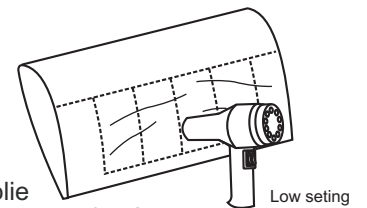



Low setting


Symbols used throughout this instruction manual, comprise:


 Drill holes using the stated size of drill (in this case 1.5 mm  $\varnothing$ )


 Take particular care here


 Hatched-in areas: remove covering film carefully

 Check during assembly that these parts move freely, without binding

 Use epoxy glue

 Apply cyano glue


 Assemble left and right sides the same way.

 Not included. These parts must be purchased separately

 Löcher bohren mit dem angegebenen Bohrer (hier 1,5 mm)


 Hier besonders aufpassen

 Schraffierte Stellen, Bespannfolie vorsichtig entfernen

 Während des Zusammenbaus immer prüfen, ob sich die Teile auch reibungslos bewegen lassen

 Epoxy-Klebstoff verwenden

 Sekundenkleber auftragen

 Linke und rechte Seite wird gleichermaßen zusammengebaut

 Nicht enthalten. Teile müssen separat gekauft werden.


**Read through the manual before you begin, so you will have an overall idea of what to do.**

**CONVERSION TABLE**

|               |                |               |                 |
|---------------|----------------|---------------|-----------------|
| 1.0mm = 3/64" | 3.0mm = 1/8"   | 10mm = 13/32" | 25mm = 1"       |
| 1.5mm = 1/16" | 4.0mm = 5/32"  | 12mm = 15/32" | 30mm = 1-3/16"  |
| 2.0mm = 5/64" | 5.0mm = 13/64" | 15mm = 19/32" | 45mm = 1-51/64" |
| 2.5mm = 3/32" | 6.0mm = 15/64" | 20mm = 51/64" |                 |

# 1-Aileron and Flap servo


WING - BOTTOM VIEW

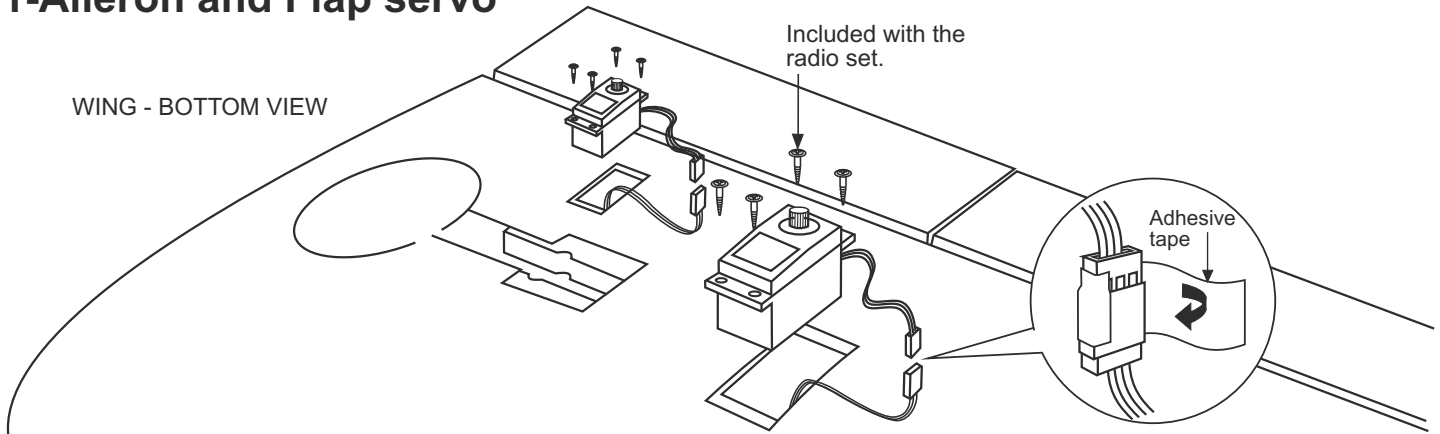

- 1-Cut away the covering of the wing bottom where the aileron servo goes.
- 2-Connect the aileron servo cord to the aileron extension cord.
- 3-Install the aileron servo on the servo mount.


Do the same way with second wing half.

-Switch on the radio (trims centered) then mount the ailerons servo in neutral position.  
 -The servo horn should be perpendicular to the servo

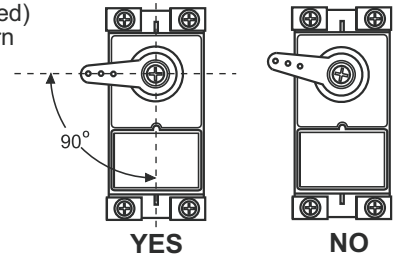

# 2-Aileron/Flap control horn

WING - BOTTOM VIEW

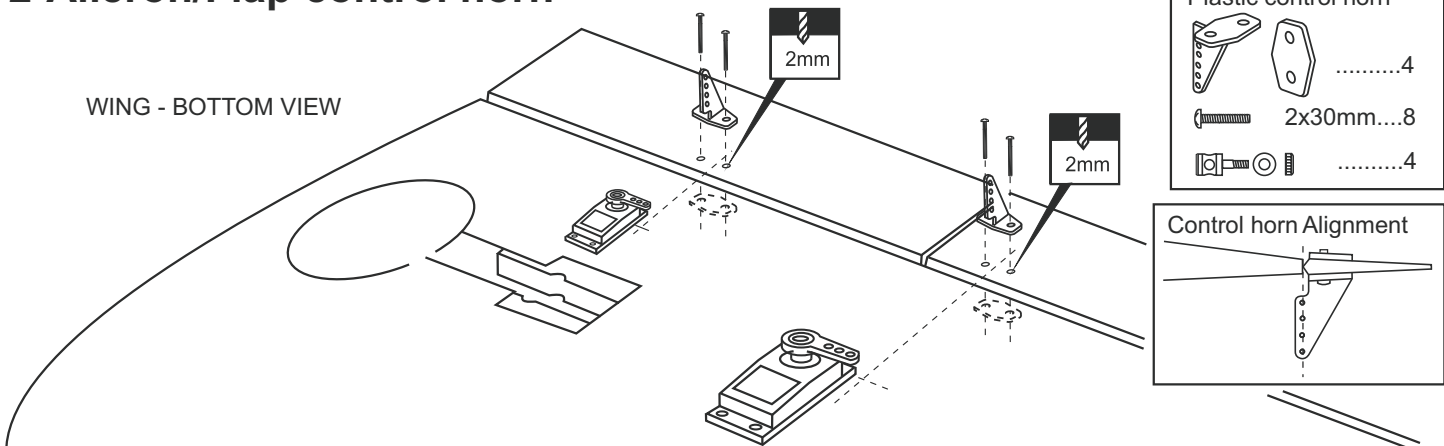


- 1-Depending on the position of the linkage, determine the location of aileron control horn. The horn holes must be perfectly aligned with the axis of articulation.
- 2-Mark the position of the "foot" of the horn on the aileron. Then, with the drill, make the 2 holes.
- 3-Install the aileron control horn as shown.

Do the same way with second wing half.


# 3-Aileron/Flap linkages

WING - BOTTOM VIEW


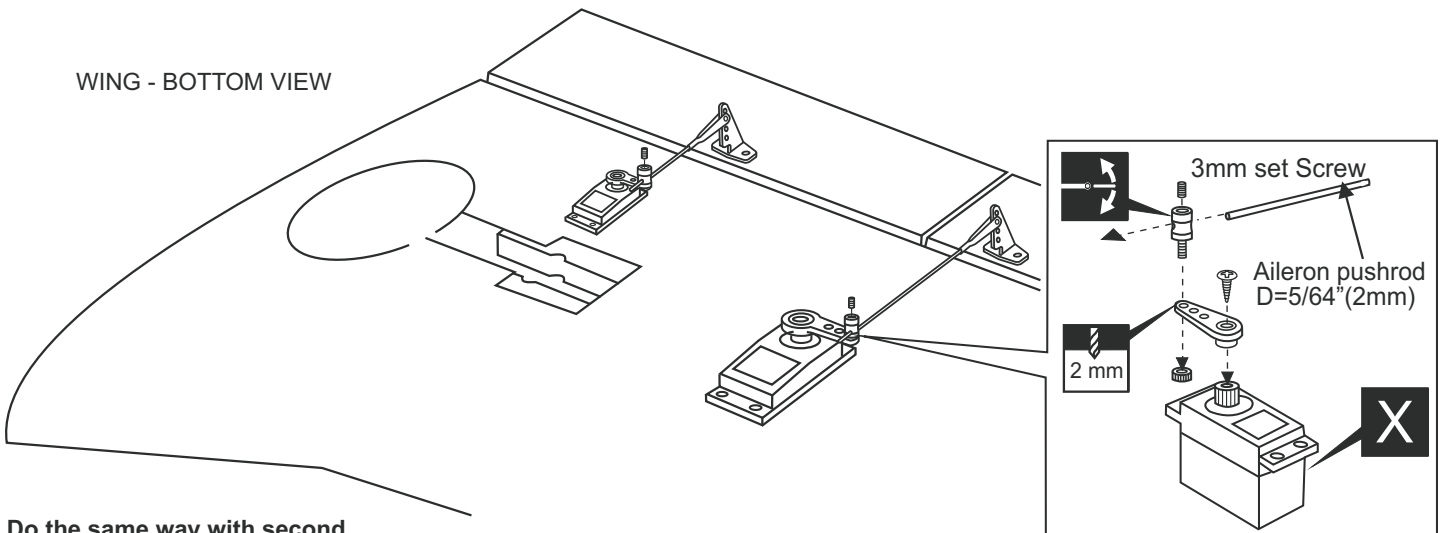


Do the same way with second wing half.


## 4-Electric retract

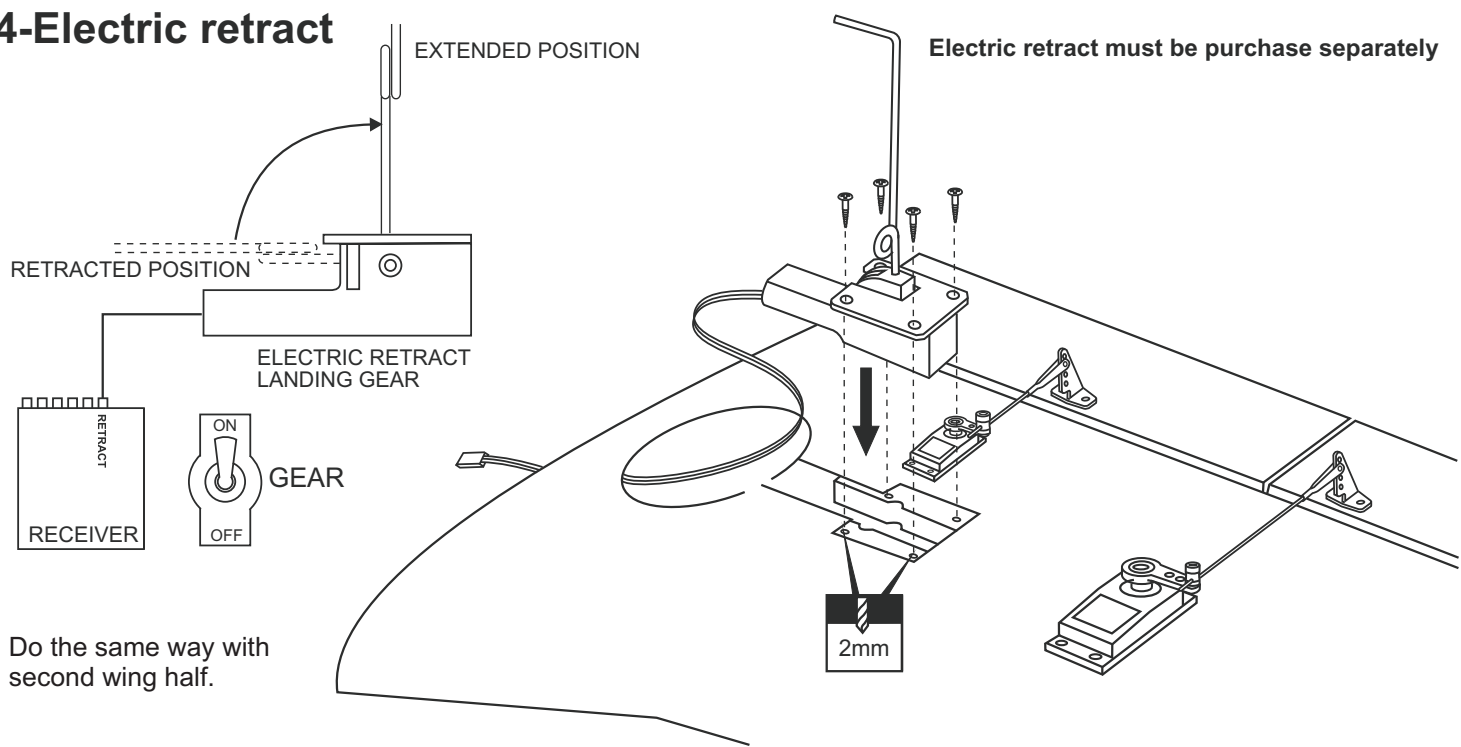

## 5-Fixed gear

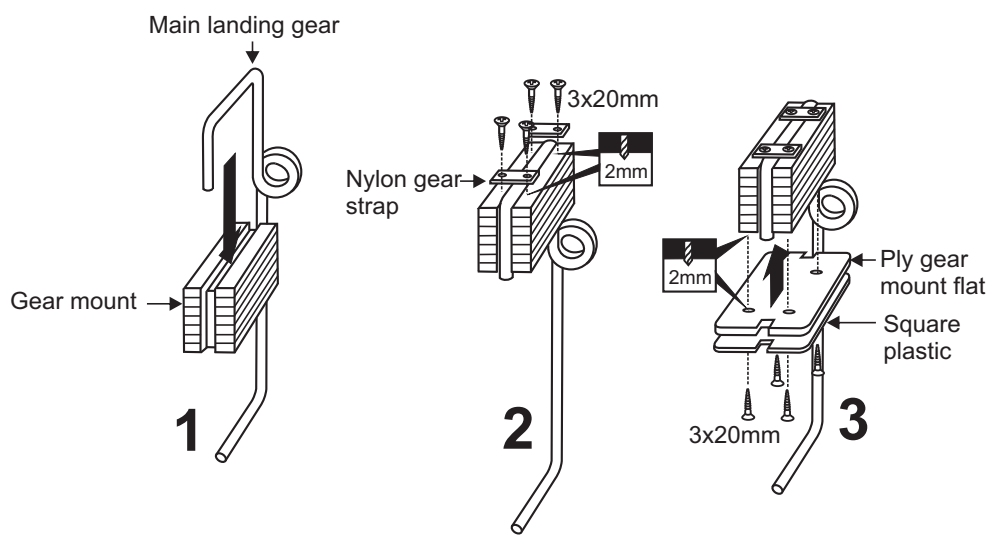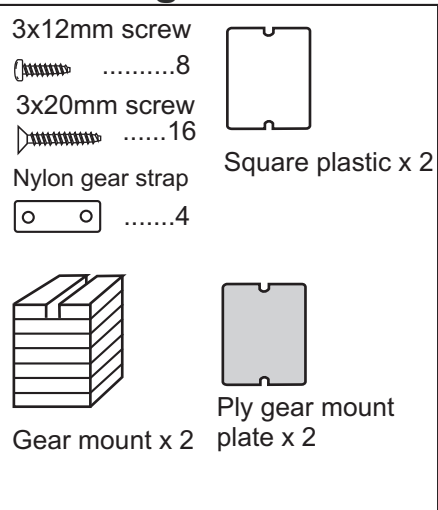


## 6-Fixed gear installation

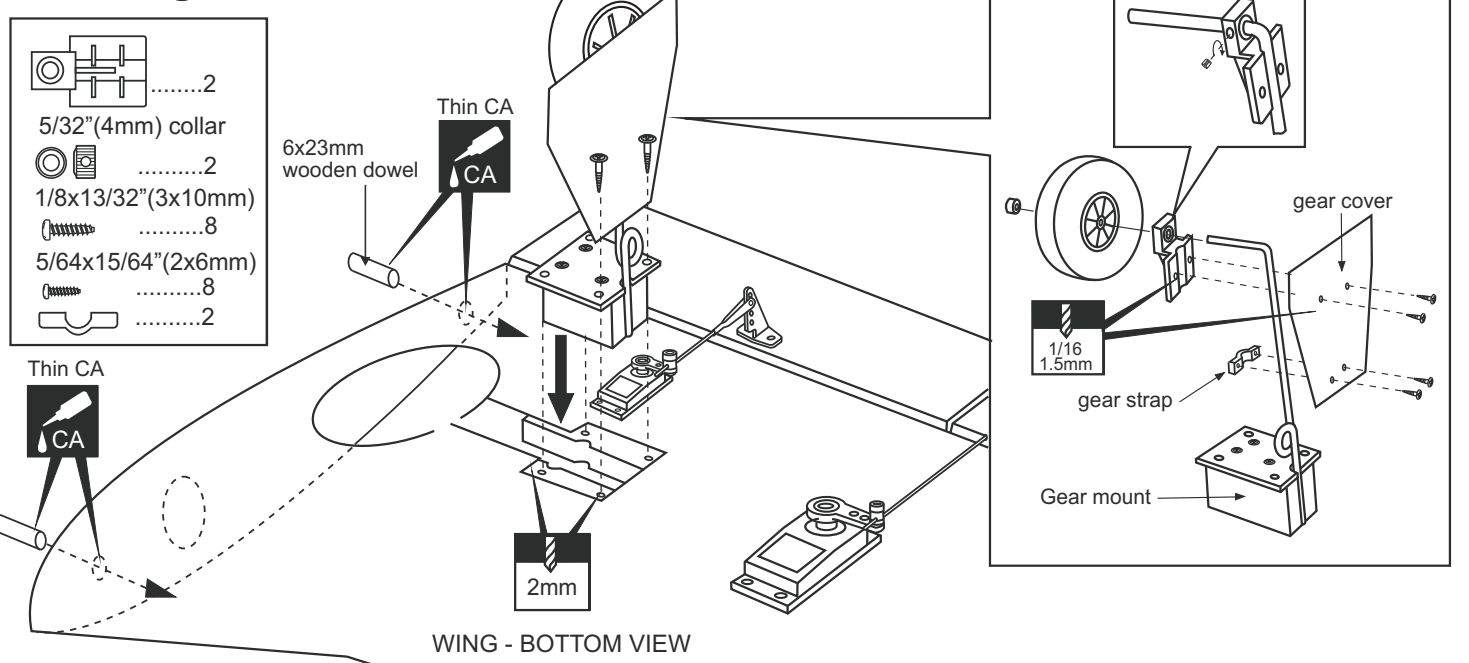

## 7-Horizontal Stabilizer

Securely glue together. If coming off during flight, you lose control of your air plane.

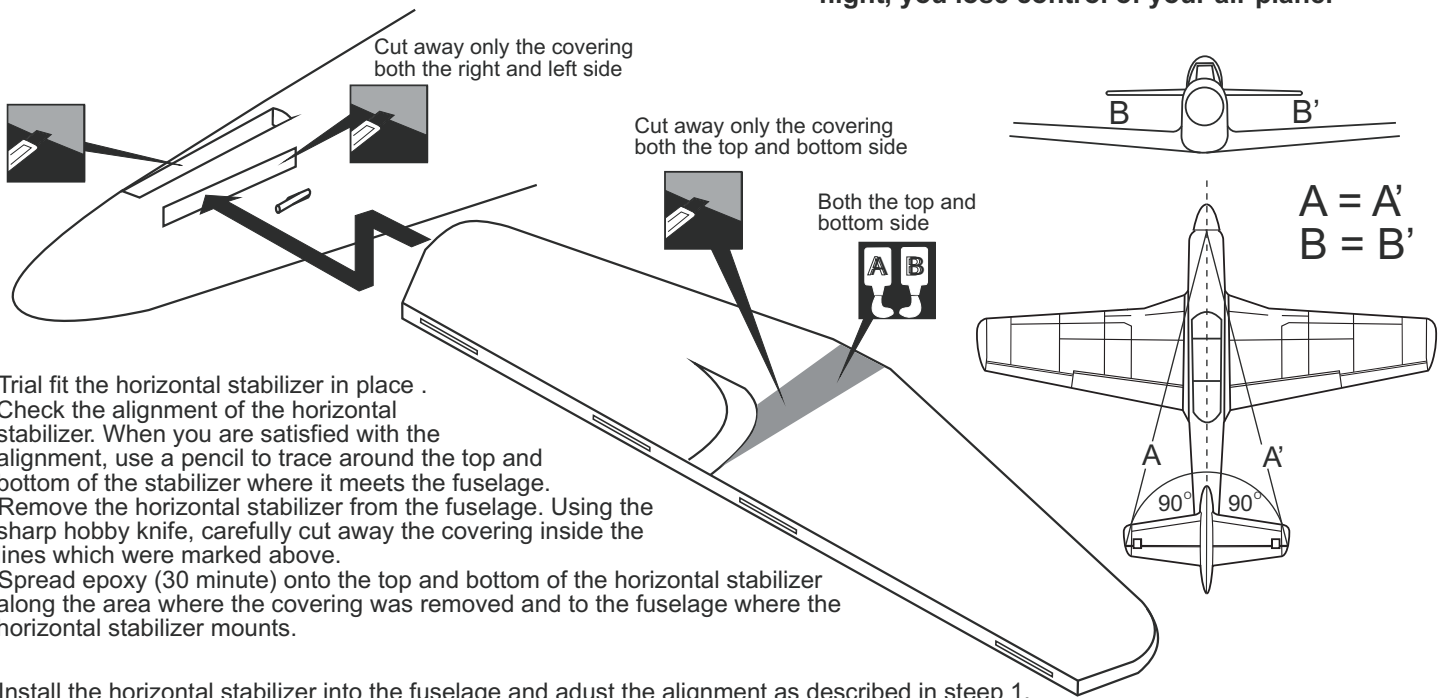



- 1-Trial fit the horizontal stabilizer in place . Check the alignment of the horizontal stabilizer. When you are satisfied with the alignment, use a pencil to trace around the top and bottom of the stabilizer where it meets the fuselage.
- 2-Remove the horizontal stabilizer from the fuselage. Using the sharp hobby knife, carefully cut away the covering inside the lines which were marked above.
- 3-Spread epoxy (30 minute) onto the top and bottom of the horizontal stabilizer along the area where the covering was removed and to the fuselage where the horizontal stabilizer mounts.

- 4-Install the horizontal stabilizer into the fuselage and adust the alignment as described in steep 1.

**IMPORTANT:** Please do not clean off the excess epoxy with strong solvent or pure alcohol, only use kerosene to keep the colour of your model not fade.

**\* WARNING:** When removing any covering from the airframe, please ensure that you secure the cut edge with CA or similar cement. This will ensure the covering remain tight.

## 8-Vertical Stabilizer

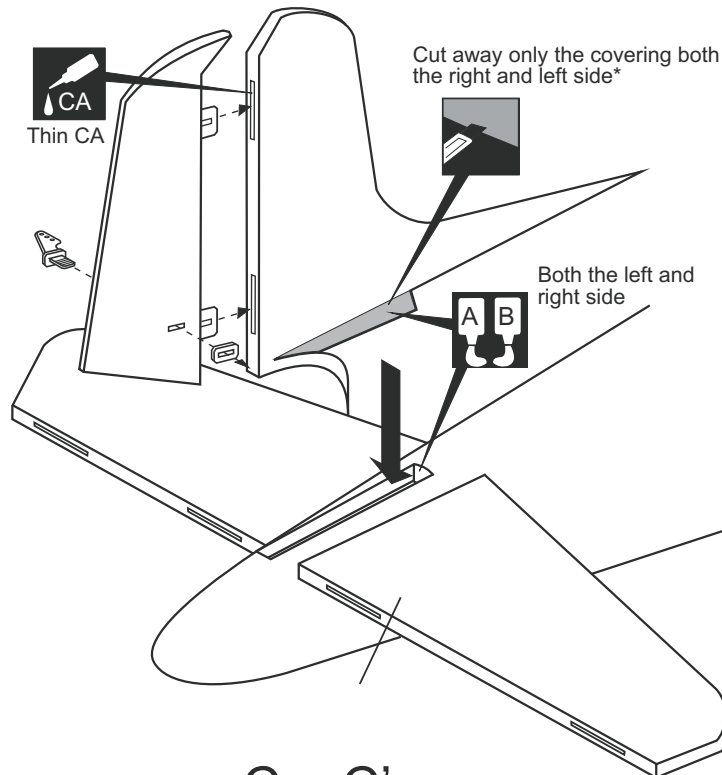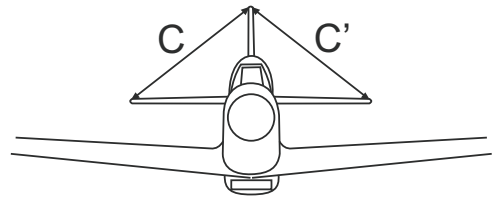

- 1-Trial fit the vertical stabilizer in place . Check the alignment of the vertical stabilizer. When you are satisfied with the alignment, use a pencil to trace around the right and left of the stabilizer where it meets the fuselage.
- 2-Remove the vertical stabilizer from the fuselage. Using the sharp hobby knife, carefully cut away the covering inside the lines which were marked above.
- 3-Spread epoxy (30 minute) onto the right and left and bottom of the vertical stabilizer along the area where the covering was removed and to the fuselage where the vertical stabilizer mounts.

- 4-Install the vertical stabilizer into the fuselage and adust the alignment as described in step 1. Allow the epoxy to cure before proceeding to next step.

- 5-Trial fit the horn. Actuate rudder linkage manually it should not be hard spot. Adjust if necessary.

- 6-Insert the plate through the foot of the horn. Bond with **thin CA glue**.



Note: The slots for the control horn installation are pre- cut at factory.

Securely glue together. If coming off during flight, you lose control of your air plane.

Plastic control horn



$C = C'$

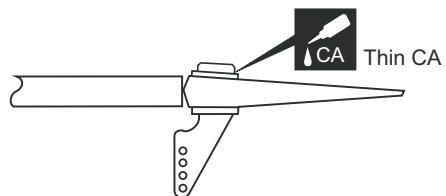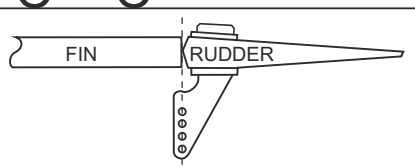



# 9-Elevator


Securely glue together. If coming off during flight, you lose control of your air plane.

1-Trial fit the horn. Actuate rudder linkage manually it should not be hard spot. Adjust if necessary.


2-Insert the plate through the foot of the horn. Bond with **thin CA glue**.

3-Repeat the previous procedures to hinge the second elevator to the other side of the horizontal stabilizer.



Note: The slots for the control horn installation are pre-cut at factory.

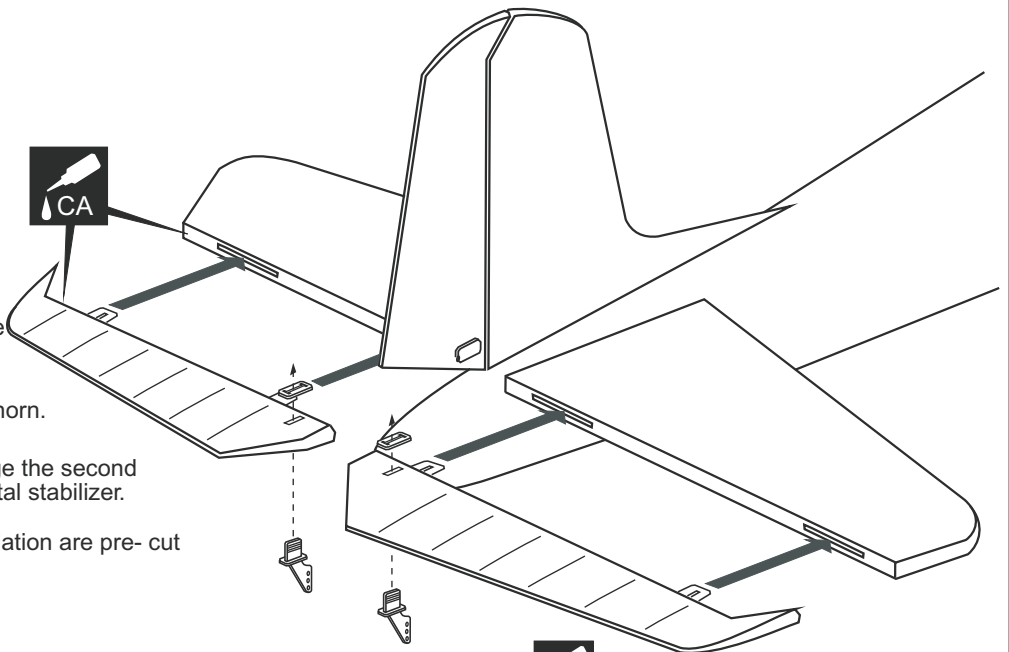

Plastic control horn






2

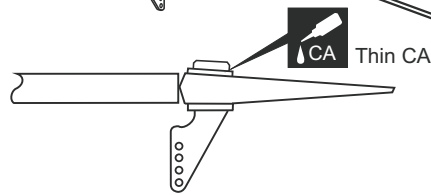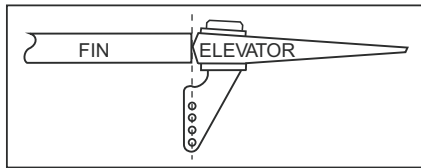



# 10-Nose gear

- Nose gear mount .....1
- 3x12mm screw...4
- Steering horn...1

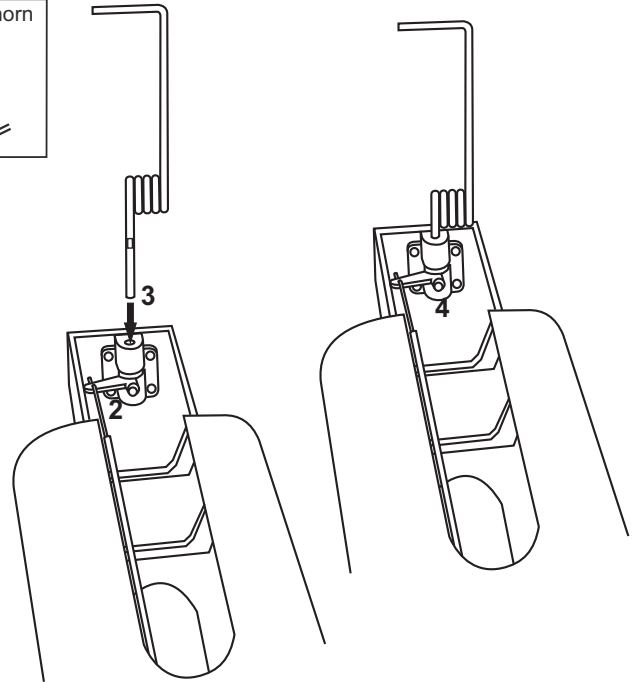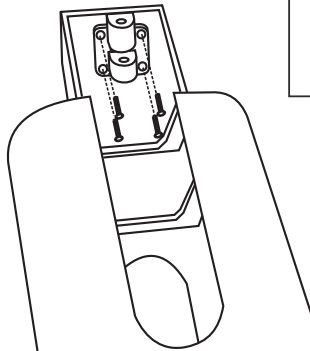

- 1-Insert "Z" bend of steering linkage inside the hole of front landing gear steering horn.
- 2-Position the steering horn inside the front landing gear mount already attached to the firewall.
- 3-Slide front leg into the bearing and through the horn.
- 4-Screw steering horn on the leg.



IN CASE OF ELECTRIC RETRACT LANDING GEAR  
**(Electric retract landing gear and Struts must purchase separately)**

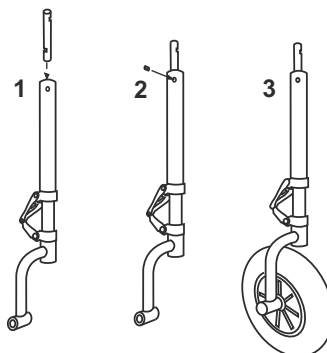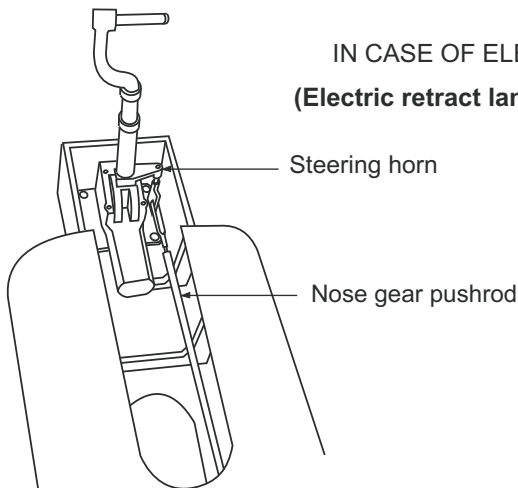

# 11-Engine mount / Engine

|              |               |
|--------------|---------------|
| 5/32x1"      | 1/8x5-1/64"   |
| 4x25mm screw | 3x20mm screw  |
| ...4         | ...4          |
| Blind-nut    | 1/8"(3mm) nut |
| .....        | .....         |
| .....4       | .....4        |




! Align the mark on both mounts with the mark on the fuselage



Using a pencil or felt tipped pen, mark the fire wall where the four holes are to be drilled.

Remove the engine mount and drill a 13/64"(5mm) hole through the fire-wall at each of the four marks marked.

Reposition the engine mounts on to the fire-wall. Attach the four blind-nut to the fire-wall as show. Secure them with four 4x25mm screw.

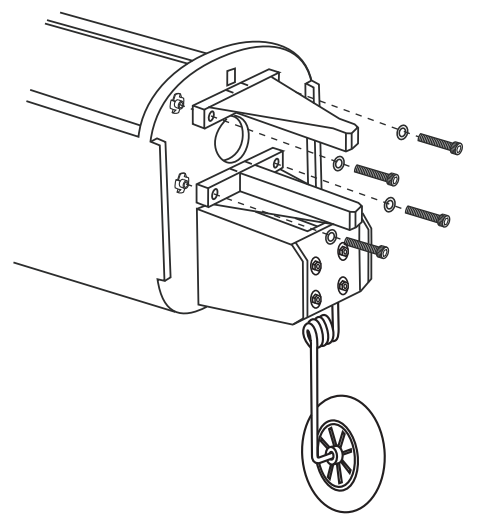
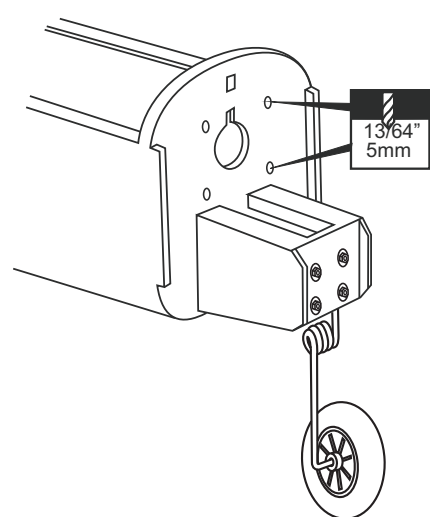
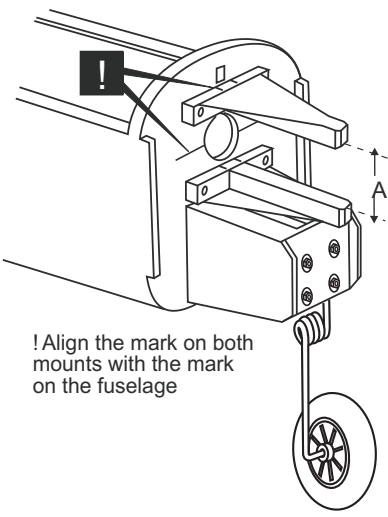


! Align the mark on both mounts with the mark on the fuselage

Position the engine on to the engine mounts so the distance from the prop hub to the fire-wall is 5.2"(132mm). Mark the engine mounting plate where the four holes are to be drilled.

Remove the engine and drill a 1/8"(3mm) holes through the beam at each of the four marks made above.

Reposition the engine on the engine mount beams, aligning it with the holes. Secure the engine to the engine mount using four 1/8x51/64"(3x25mm) screws.

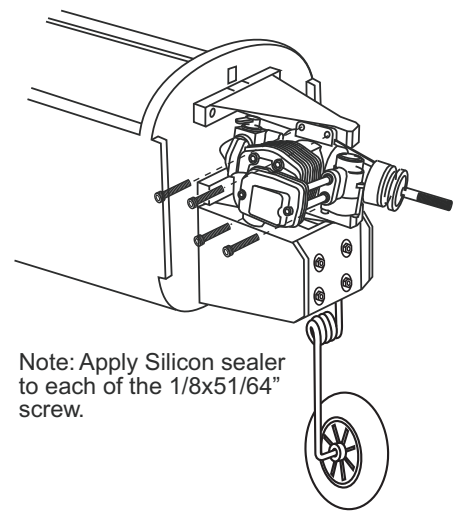
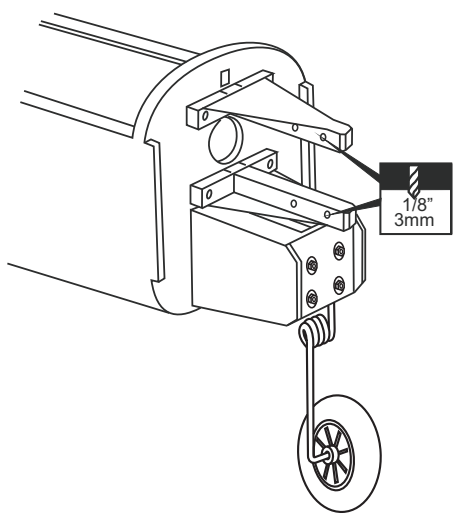
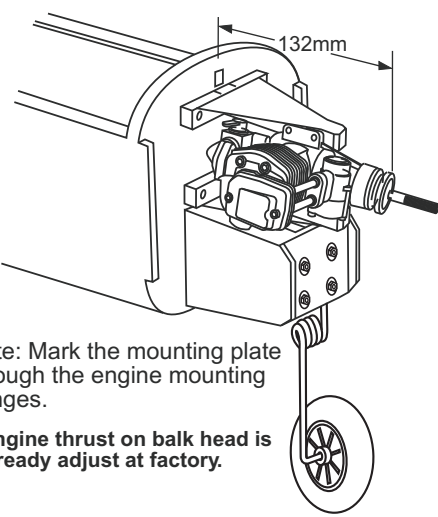


Note: Mark the mounting plate through the engine mounting flanges.

! Engine thrust on balk head is already adjust at factory.

Note: Apply Silicon sealer to each of the 1/8x51/64" screw.


# 12-Fuel tank

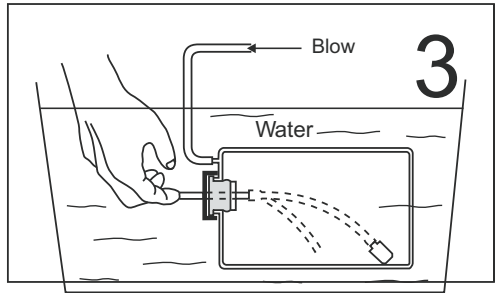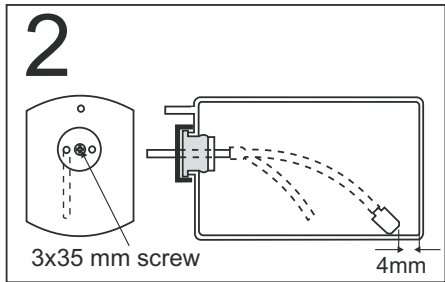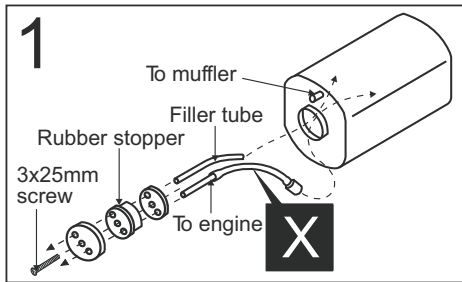

After confirming the direction . Insert this assembly, clunk end first, into the fuel tank and tighten and screw the fuel tank cap on firmly. Ensure that the fuel tank clunk does not touch the rear of the fuel tank.

Checking for leaks - block the vents and blow into the feed - if in doubt submersing the tank in a blow of water will show up any problems.


## 13-Electric Motor





Using an aluminum motor mounting plate as a template, mark the plywood motor mounting plate where the four holes are to be drilled.

Remove the aluminum motor mounting plate and drill a 1/8" (3mm) hole through the plywood at each of the four marks marked.


Note: The aluminum motor mounting included with electric motor set.

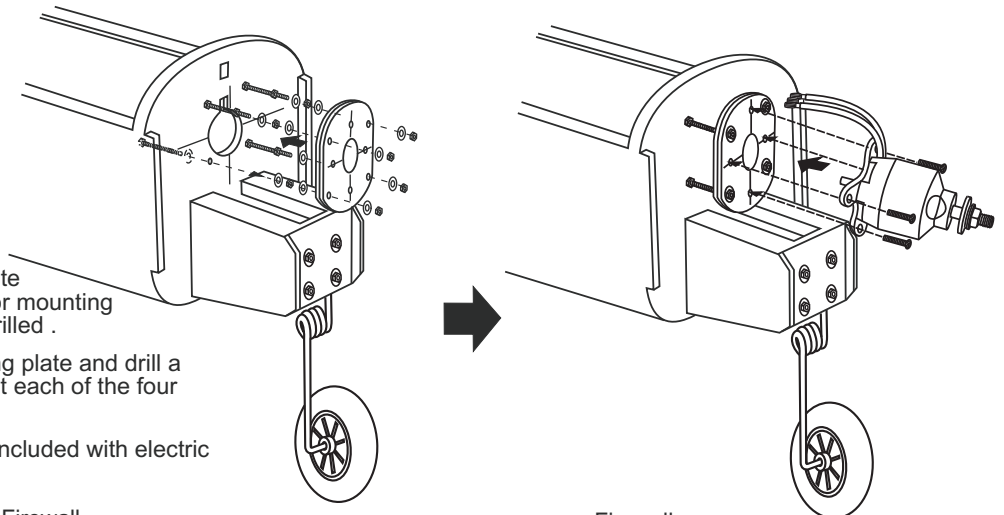

|  |                   |
|--|-------------------|
|  | 4x60mm.....4      |
|  | 4mm nut.....12    |
|  | 4mm washer...16   |
|  | 3mm screw/nut...4 |

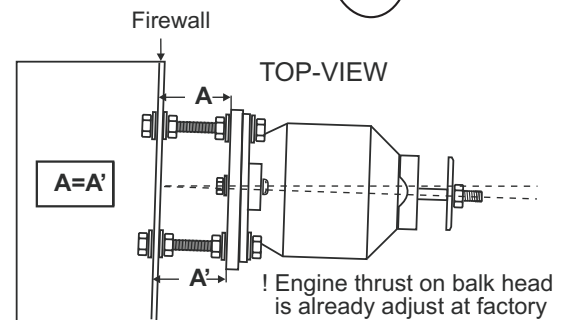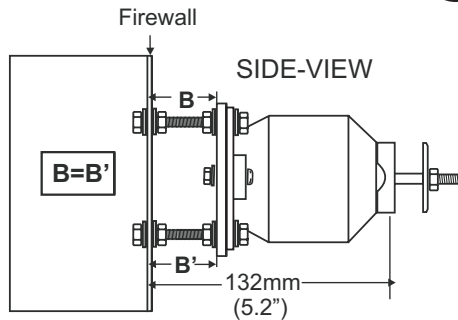


## 14-Cowling

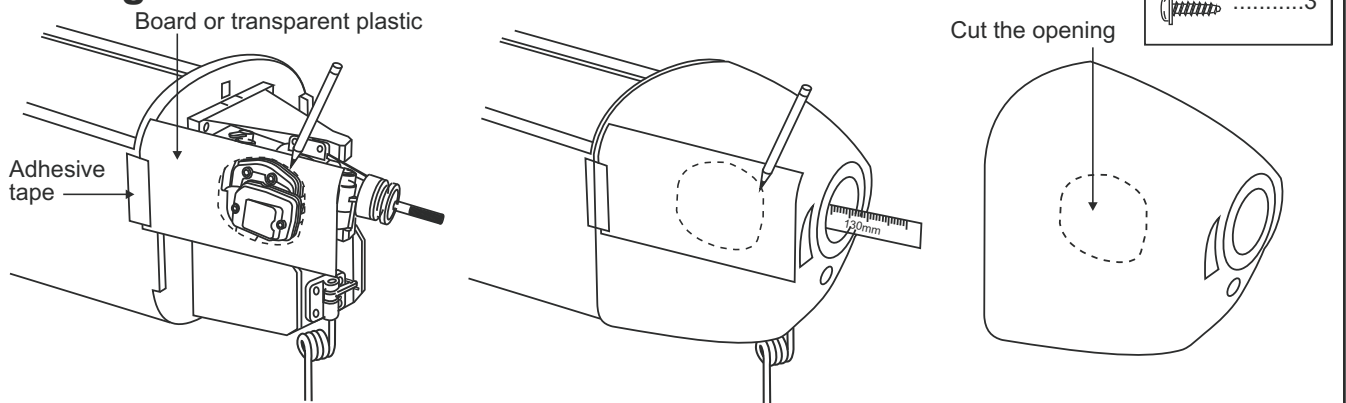

- 1-Attach the board or transparent plastic on the side of the fuselage with the adhesive tape as show.
- 2-Using a pencil or felt tipped pen trace around the engine head where it meet the cowl. Cut the opening the board or transparent plastic for the engine head as marked before.
- 3-Remove the engine and insert the cowl on to the fuselage so the distance from the fire wall to the front of the cowl is 5.1"(130mm). Trace around inside the hole on the board or transparent plastic with a pencil.
- 4-Remove the cowl from the fuselage and carefully cut the opening for the engine head as marked above. Do the same way with the hole for needle-valve.
- 5-Again. Insert the cowl on to the fuselage and secure it in place with five 2.5x10mm self tapping screws.

## 15-Servo

### FUSELAGE - TOP VIEW

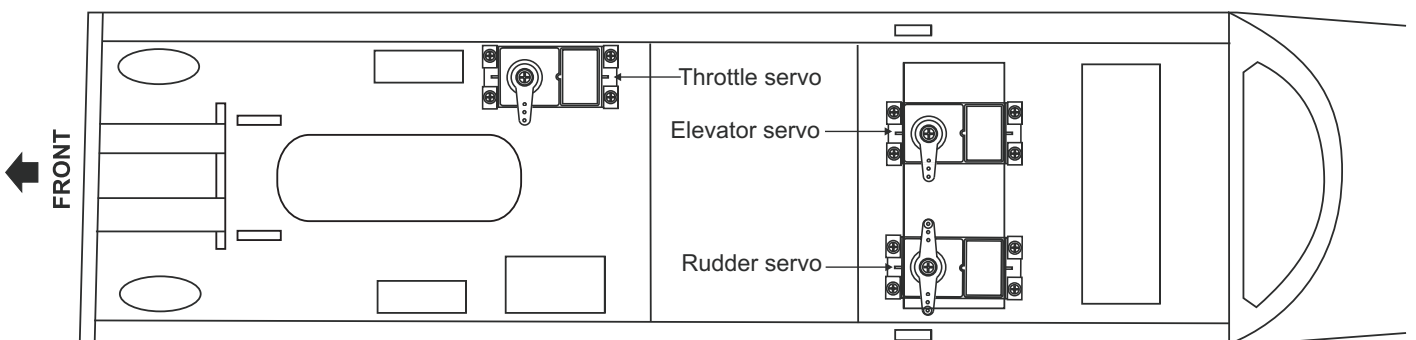


Shift the location of the fuel tank, battery pack, or Li-po battery as needed to obtain the specified CG.




# 16-Linkages

FUSELAGE - TOP VIEW

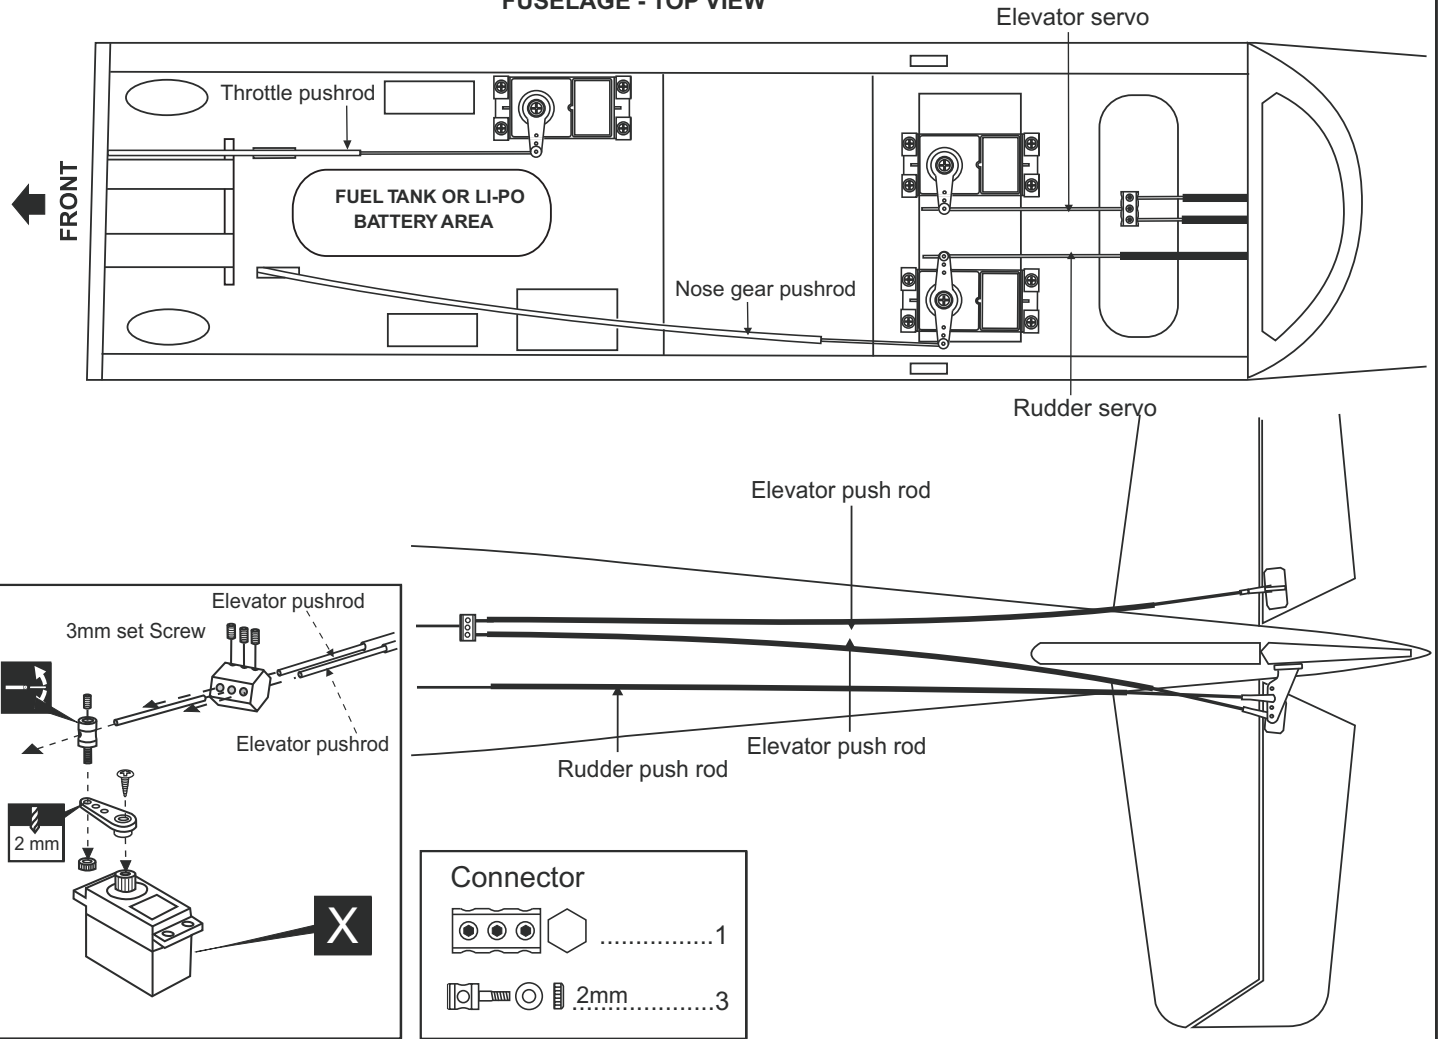


# 17-Installation the Wing


FUSELAGE - TOP

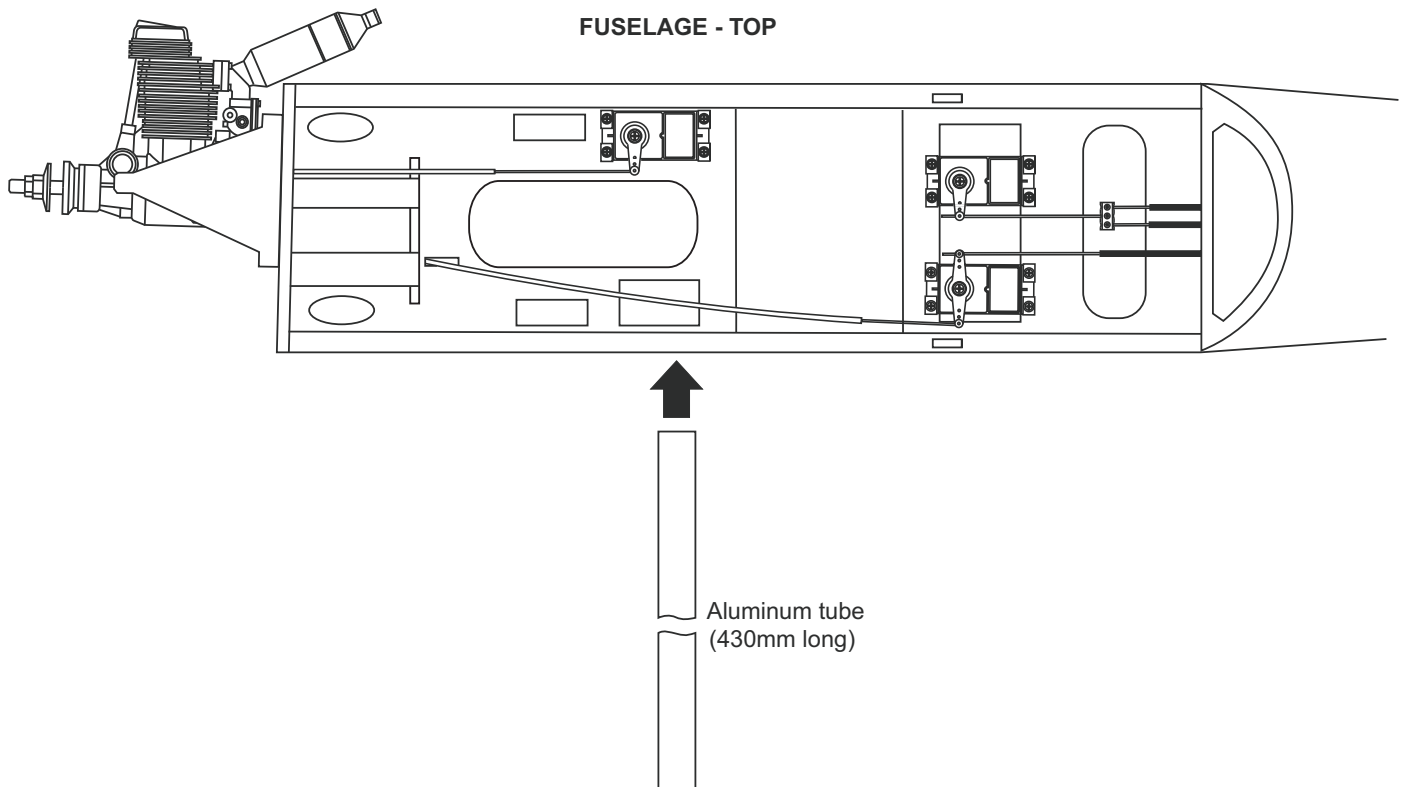


## 18-Installation the Wing

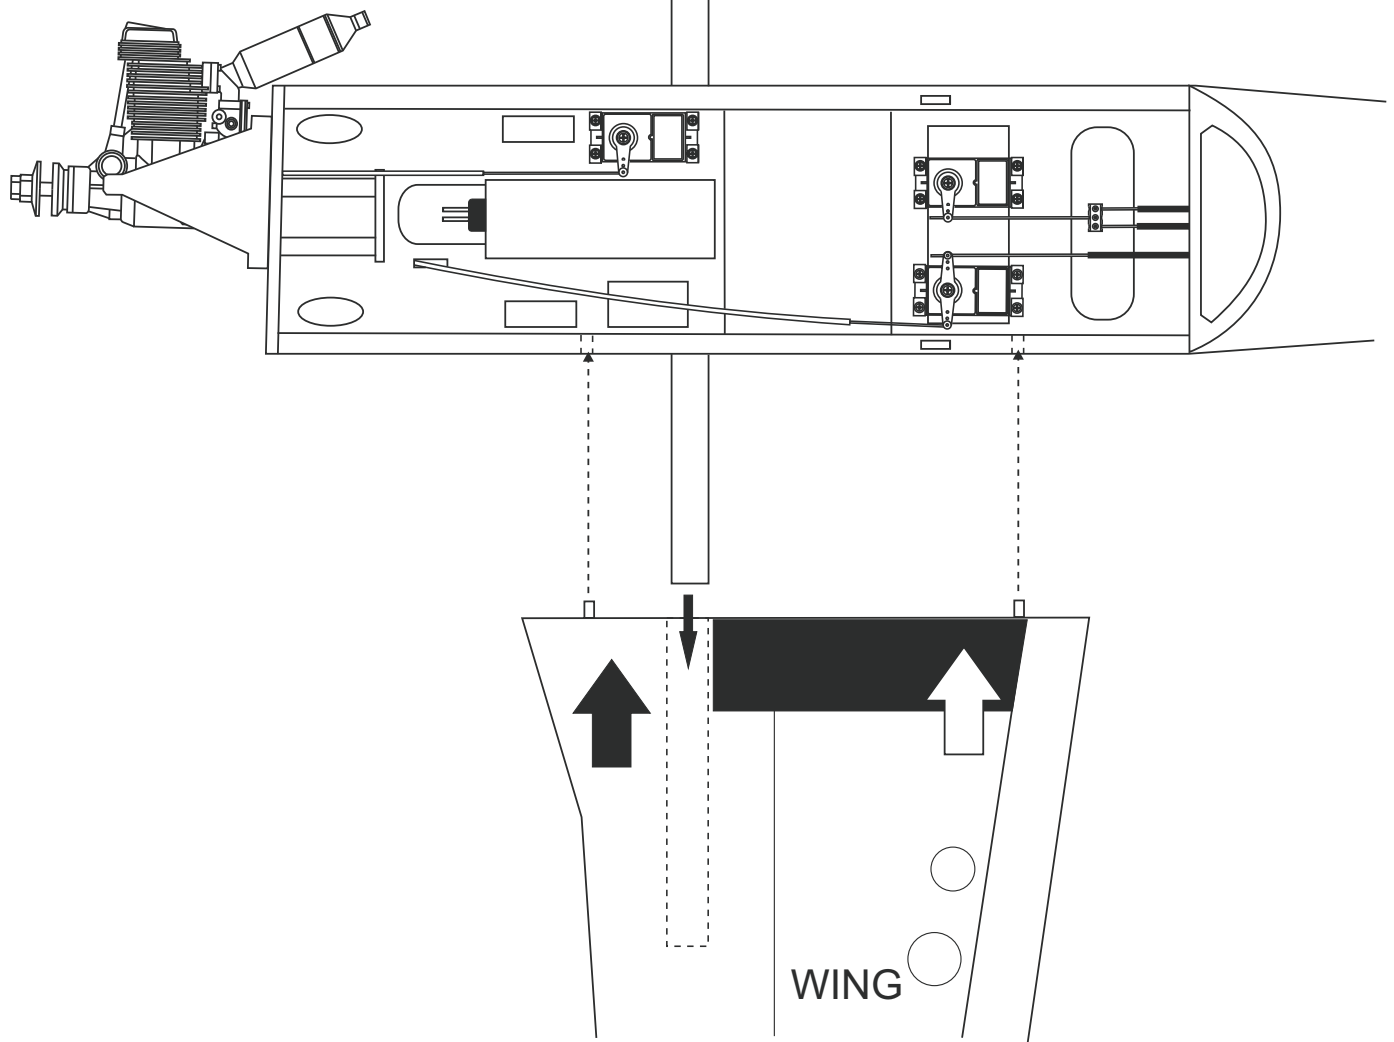


## 19-Installation the wing

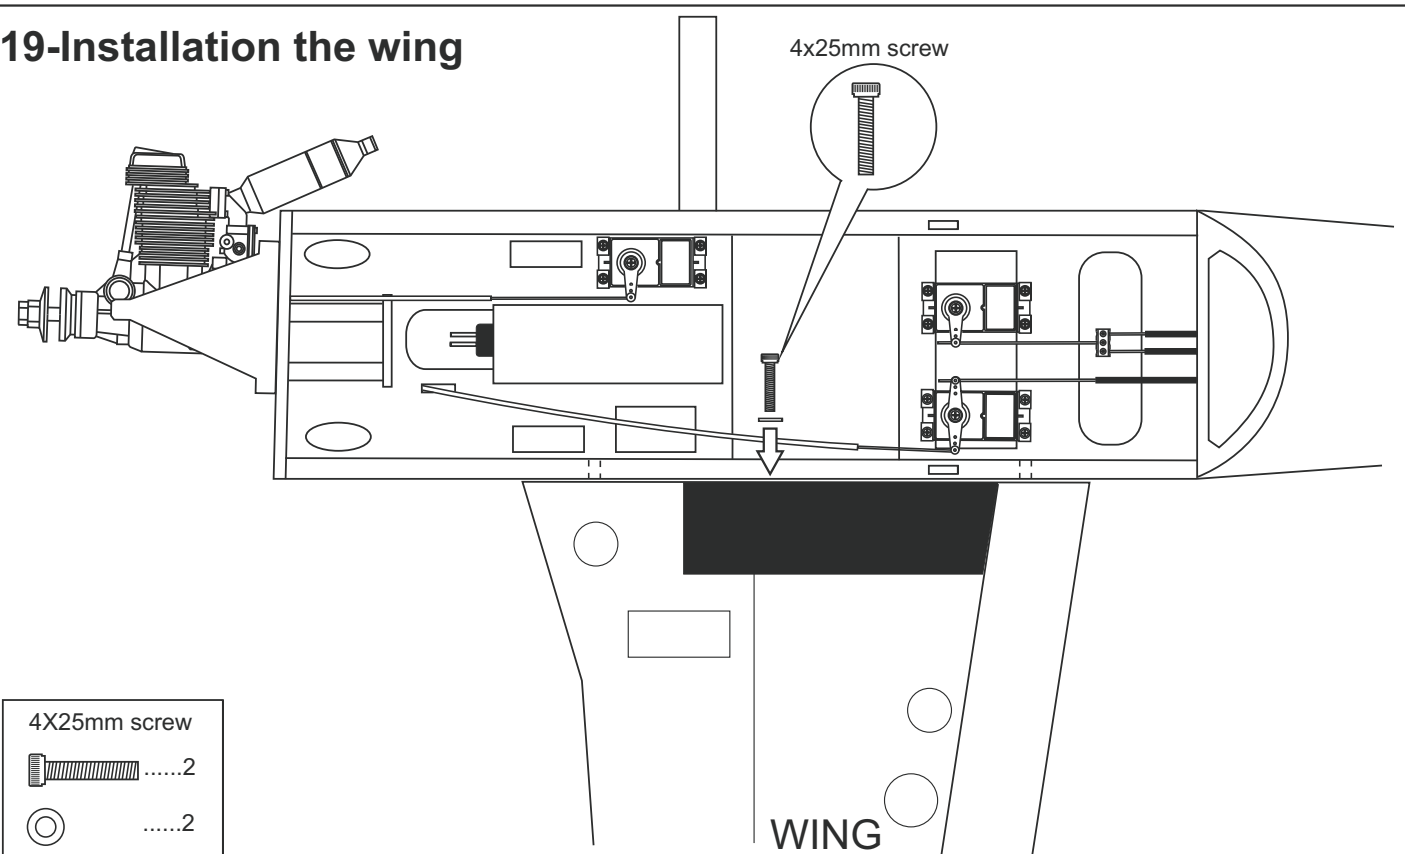

## 20-Canopy

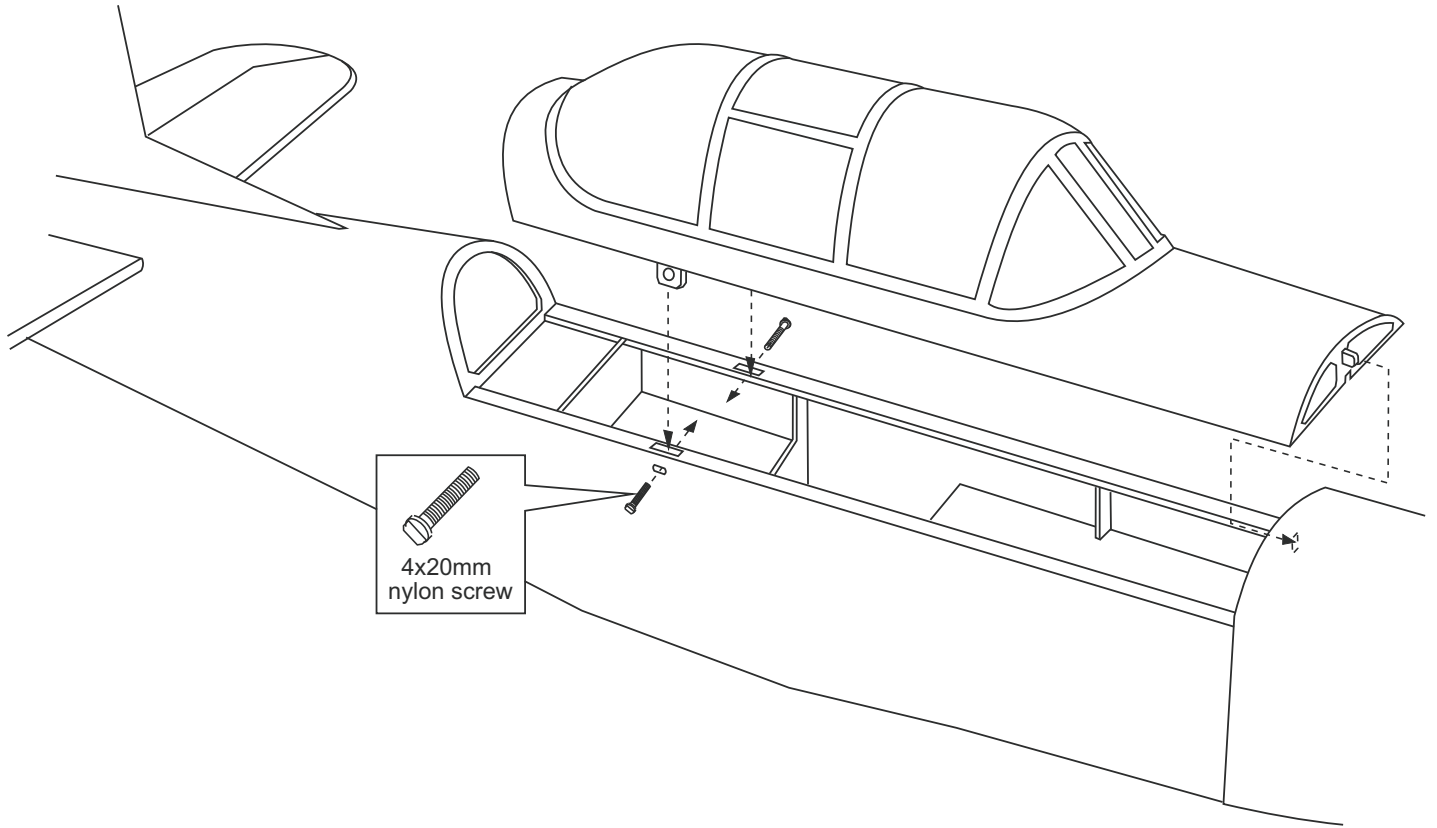

## 21-Decor

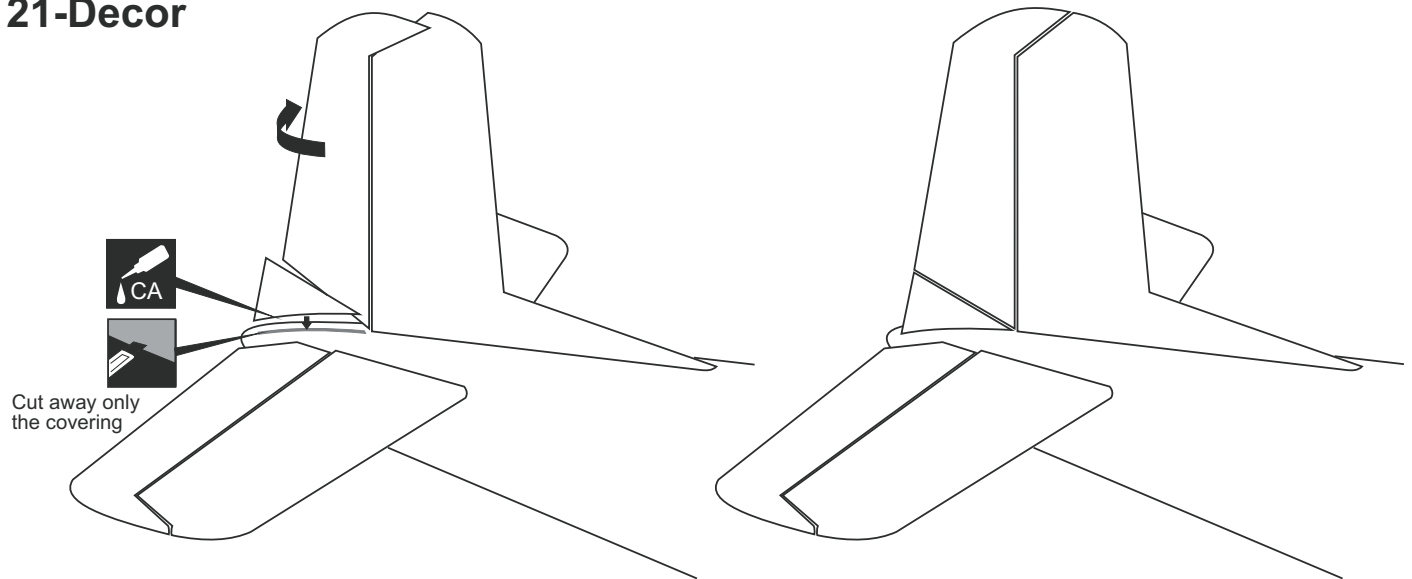

## 22-Decor

Sticker: See the top of the box



Note: Cut out the stickers and apply them in the proper area. Do not peel the backing paper off all at once.

Peel off one corner of the backing and cut off with scissors. Arrange sticker on model and when satisfied adhere the corner without backing.



Carefully peel back the rest of the backing while at the same time adhering the rest of the sticker.

Try not to make air bubbles, if there are some, carefully puncture sticker (center of bubble) but not model surface with the tip of the knife or sharp pin and squeeze out the air. At curves stretch sticker and apply a little heat so that no ceases occur.

Cut off the excess that is produced.

## 23-Decor


### Lighting

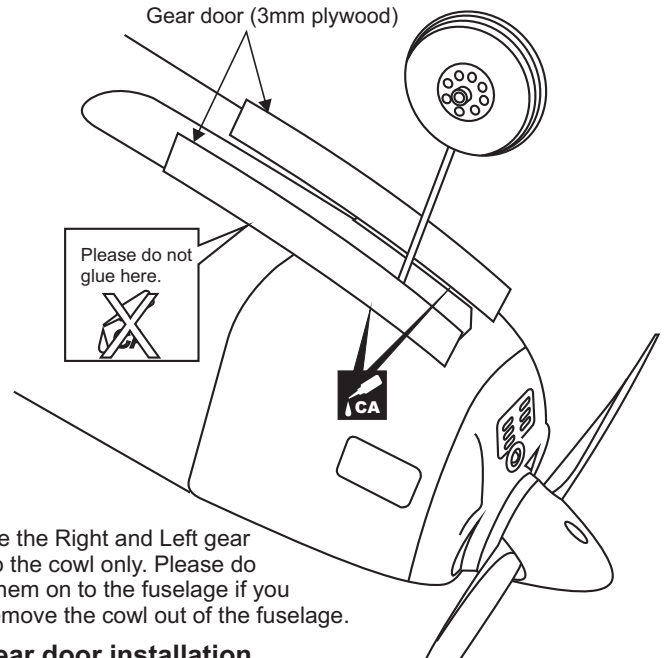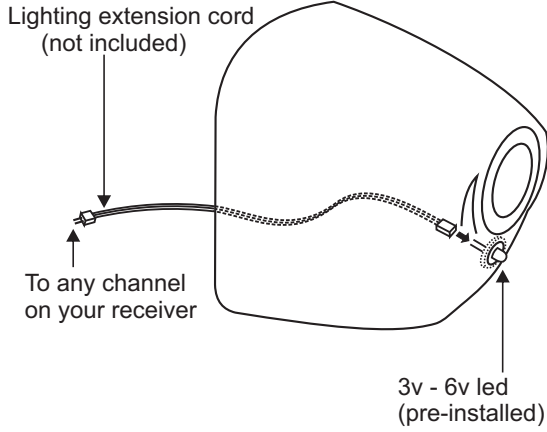





## 24-Balance

**DO NOT try to fly an out-of-balance model !**

Note: If necessary, move the battery pack or add weight to either the tail or nose until the correct balance is achieved.

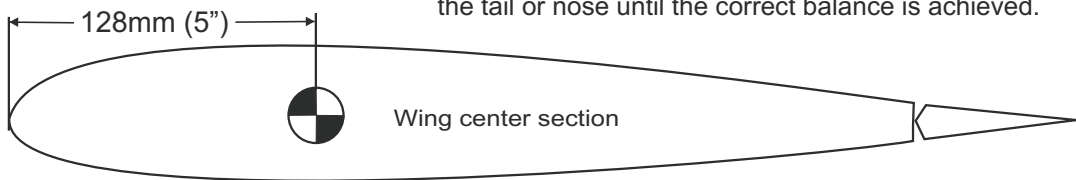

## 25-Control Surface

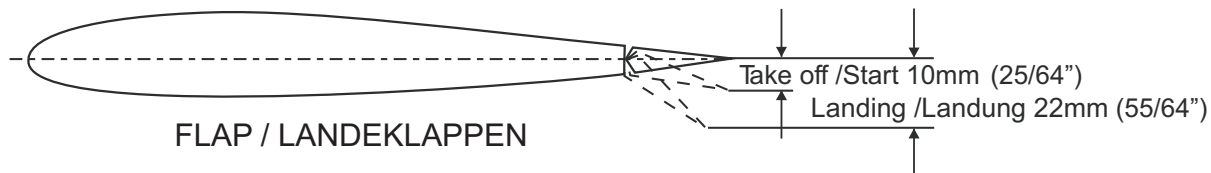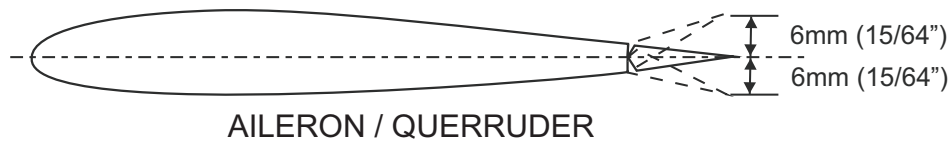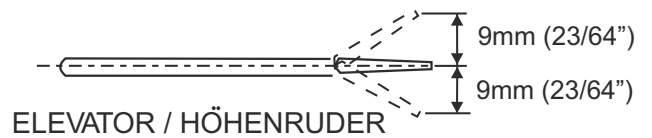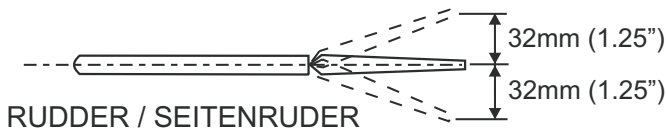

**IMPORTANT:** Please do not clean your model with pure alcohol, only use liquid soap with water or use glass cleaner to clean on surface of your model to keep the colour not fade.

All details are subject to changewithout notice !

Technische Änderungen und Irrtümer vorbehalten !